



# HOLLEBOUTKETTING MXT HOLLOW PIN CHAINS MXT

Type A, B en C

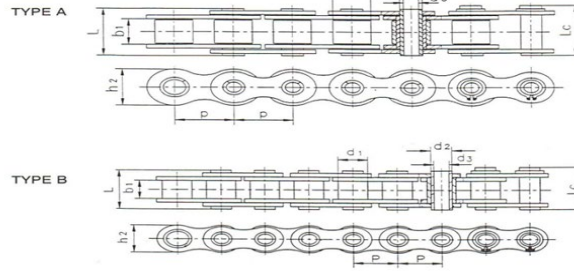

Ketting	Merk	Code	Afmetingen [mm]								kN min	Kg/m	Type
			steek / p	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max			
08B HP	MXT	43608100	12,70	8,51	7,75	6,38	4,50	16,8	18,1	12,2	13,5	0,60	A
10B HP	MXT	43610100	15,88	10,16	9,65	7,03	5,00	18,6	20,8	14,3	14,5	0,83	A
12B HP	MXT	43612100	19,05	12,07	11,68	8,10	5,75	24,0	23,6	16,5	18,5	1,05	A
16B HP	MXT	43616100	25,40	15,88	17,02	11,10	8,10	36,0	38,0	21,0	50,0	2,40	A
40HP	MXT	43640100	12,70	7,95	7,85	5,63	4,00	16,5	17,6	12,0	11,0	0,54	B
50HP	MXT	43650100	15,88	10,16	9,40	7,03	5,13	20,7	21,9	15,1	20,0	0,91	B
60HP	MXT	43660100	19,05	11,91	12,70	8,31	6,00	25,8	26,4	18,0	24,0	1,29	B
80HP	MXT	43680100	25,40	15,88	15,75	11,10	8,03	32,7	33,9	24,0	52,0	2,50	B

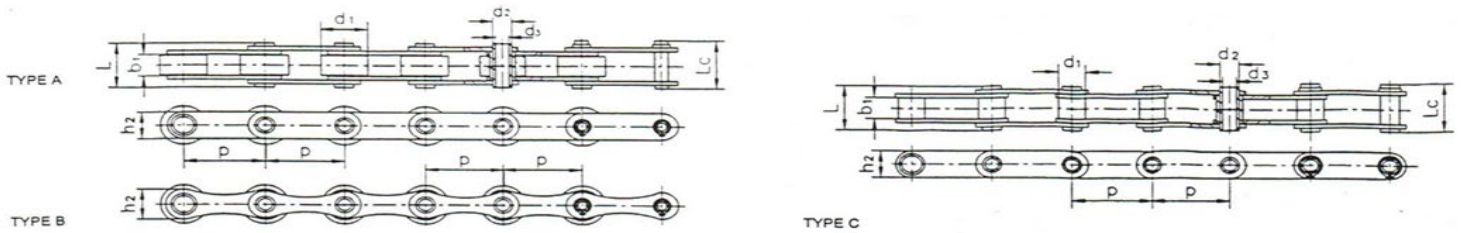

Ketting	Merk	Code	Afmetingen [mm]								kN min	Kg/m	Type
			steek / p	d1 max	b1 min	d2 max	d3 min	L max	Lc max	h2 max			
C2042HP	MXT	43720420	25,40	15,88	7,85	5,63	4,00	16,6	17,4	12,0	11,0	0,82	A
C2052HP	MXT	43720520	31,75	19,05	9,53	7,22	5,13	20,5	21,8	15,0	20,4	1,25	A
C2062HP	MXT	43720620	38,10	22,23	12,70	8,31	6,00	25,8	26,8	17,0	24,0	1,72	A
C2082HP	MXT	43720820	50,80	28,58	15,75	11,10	8,03	32,7	33,9	24,0	52,0	3,54	A
HP35	MXT	43735100	35,00	20,00	16,00	13,35	10,20	30,4	31,6	26,3	23,5	2,02	B
HB35	MXT	43736100	35,00	20,00	16,00	14,00	10,20	32,0	33,5	38,1	40,0	2,39	B
HB50	MXT	43750100	50,00	30,00	10,50	11,40	8,20	27,4	28,6	26,0	50,0	2,23	B
HB50.8	MXT	43758100	50,80	30,00	10,50	11,40	8,20	27,4	28,6	26,0	50,0	2,56	B
HB63	MXT	43763100	63,00	30,00	10,00	11,40	8,10	26,7	28,1	26,5	50,0	2,07	B
HB100	MXT	43710000	100,00	30,00	10,50	11,40	8,20	27,4	28,6	26,0	50,0	1,56	B
C2040HP	MXT	43720400	25,40	7,95	7,85	5,63	4,00	16,6	17,4	12,0	11,0	0,46	C
C2050HP	MXT	43720500	31,75	10,16	9,40	7,03	5,13	20,9	21,9	15,1	20,0	0,76	C
C2060HP	MXT	43720600	38,10	11,91	12,70	8,31	6,00	25,8	26,8	17,0	24,0	1,02	C
C2080HP	MXT	43720800	50,80	15,88	15,75	11,10	8,03	32,7	33,9	24,0	52,0	1,98	C



# BRC HOLLEBOUTKETTING - DIN 8187 - ISO 606

## BRC ROLLER CHAINS HOLLOW PIN - DIN 8187 - ISO 606

A-kwaliteit | simplex type A 08B1 t/m 12B1 - simplex type B 08B1 t/m 16B1



Type A - bus

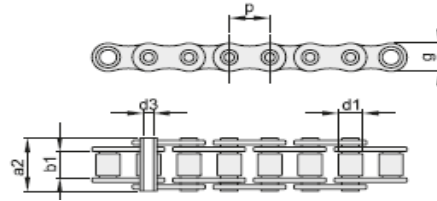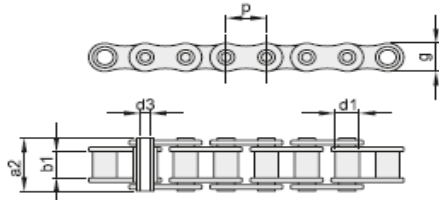

Type B - rol

Ketting geproduceerd door een ISO 9001 - ISO 14001 & API 7F gecertificeerd bedrijf.

Voorgerekte kettingen (30%).

Verpakt per 5 meter.




### SIMPLEX

ISO	Merk	Code	p		b1	d3	d1	a2	g	Breukbelasting		q	Type
			Steek							Min.	Gem.		
			mm	inch	mm	mm	mm	mm	mm	kN	kN	≈	
08B1-A HP	BRC	47408101	12,7	1/2"	7,75	4,50	8,51	17,0	11,6	9,3	12,8	0,58	A
10B1-A HP	BRC	47410101	15,875	5/8"	9,65	5,18	10,16	19,6	14,7	12,7	16,4	0,73	A
12B1-A HP	BRC	47412101	19,05	3/4"	11,68	5,85	12,07	22,7	15,9	12,7	17,5	1,10	A
08B1-B HP	BRC	47408102	12,7	1/2"	7,75	4,50	8,51	17,0	11,6	10,8	17,4	0,58	B
10B1-B HP	BRC	47410102	15,875	5/8"	9,65	5,18	10,16	19,6	14,5	14,7	19,7	0,77	B
12B1-B HP	BRC	47412102	19,05	3/4"	11,68	5,85	12,07	22,7	15,9	16,7	23,3	0,98	B
16B1-B HP	BRC	47416102	25,4	1"	17,02	8,33	15,88	36,1	20,5	32,7	41,0	2,21	B

# BRC HOLLEBOUTKETTING RVS - DIN 8187 - ISO 606

## BRC ROLLER CHAINS HOLLOW PIN SS - DIN 8187 - ISO 606

A-kwaliteit | "INOX AISI 304" | simplex type B 08B1 t/m 16B1

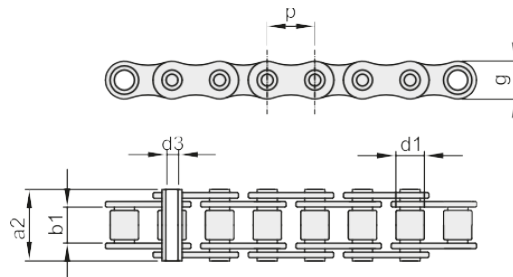

Type B - rol

Ketting geproduceerd door een ISO 9001 - ISO 14001 & API 7F gecertificeerd bedrijf.

Voorgerekte kettingen (30%).

Verpakt per 5 meter.



### SIMPLEX

ISO	Merk	Code	p		b1	d3	d1	a2	g	Breukbelasting		q	Type
			Steek							Min.	Gem.		
			mm	inch	mm	mm	mm	mm	mm	kN	kN	≈	
08B1-B HP SS	BRC	641512000	12,7	1/2"	7,75	4,50	8,51	17,0	11,6	8,3	10,6	0,58	B
10B1-B HP SS	BRC	641515000	15,875	5/8"	9,65	5,18	10,16	19,6	14,5	11,8	13,9	0,77	B
12B1-B HP SS	BRC	641519000	19,05	3/4"	11,68	5,85	12,07	22,7	15,9	12,0	17,2	0,98	B
16B1-B HP SS	BRC	641525000	25,4	1"	17,02	8,33	15,88	36,1	20,5	20,0	36,0	2,21	B