


# METEOR ROLLENKETTING MET ZAAGLIIPPEN


## METEOR ROLLER CHAINS WITH TOOTHED PLATES

Ketting op [aanvraag](#) - simplex, duplex en triplex

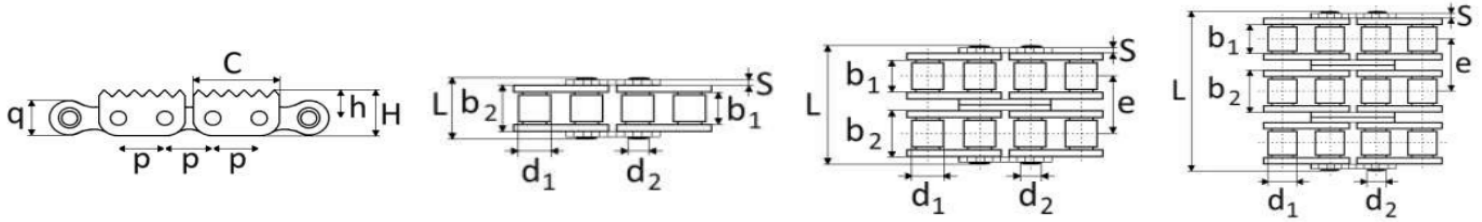


\*) 1 = enkelzijdig, 2 = tweezijdig / complete ketting op aanvraag

| Type schakel | Code*        | Afmetingen [mm] |        |        |        |       |       |       |       |      |      |    | Breukbelasting |        |
|--------------|--------------|-----------------|--------|--------|--------|-------|-------|-------|-------|------|------|----|----------------|--------|
|              |              | Steek / p       | b1 min | b2 max | d1 max | d2    | L max | q max | e     | h    | H    | C  | S              | N min  |
| 16B-1 2M3    | 4401610(1/2) | 25,4            | 17,02  | 25,45  | 8,28   | 15,88 | 35,0  | 20,3  | -     | 14,4 | 26,5 | 46 | 3,1            | 60000  |
| 16B-2 2M3    | 4401620(1/2) | 25,4            | 17,02  | 25,45  | 8,28   | 15,88 | 67,3  | 20,3  | 31,88 | 14,4 | 26,5 | 46 | 3,1            | 106000 |
| 16B-3 2M3    | 4401630(1/2) | 25,4            | 17,02  | 25,45  | 8,28   | 15,88 | 99,0  | 20,3  | 31,88 | 14,4 | 26,5 | 46 | 3,1            | 160000 |

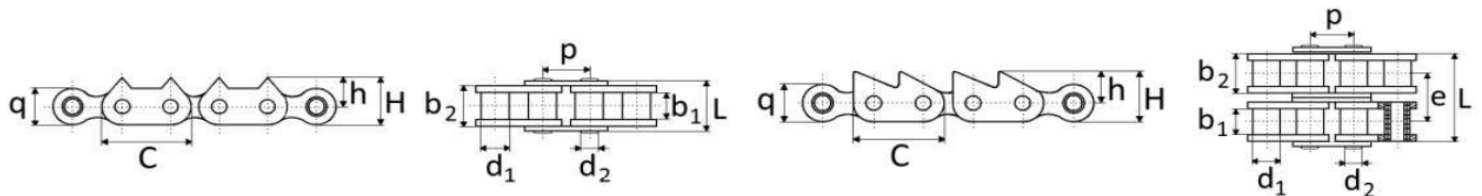


\*) 1 = enkelzijdig, 2 = tweezijdig / complete ketting op aanvraag

| Type schakel        | Code*        | Afmetingen [mm] |       |        |        |        |       |       |       |       |      |       | Breukbelasting |  |
|---------------------|--------------|-----------------|-------|--------|--------|--------|-------|-------|-------|-------|------|-------|----------------|--|
|                     |              | Steek / p       | C     | b1 min | b2 max | d1 max | d2    | L max | q max | e     | h    | H     | N min          |  |
| 20B-1 2Ma3.101 2T   | 4412010(1/2) | 31,75           | 57,75 | 19,56  | 29,01  | 10,19  | 19,05 | 40,4  | 26,0  | -     | 19,9 | 33,00 | 95000          |  |
| 16B-2 2Ma8.001GL 2T | 4411620(1/2) | 25,4            | 47,00 | 17,02  | 25,45  | 8,28   | 15,88 | 66,7  | 20,3  | 31,88 | 18,5 | 28,26 | 106000         |  |

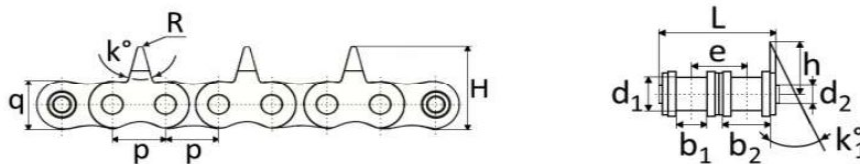

\*) 1 = enkelzijdig, 2 = tweezijdig / complete ketting op aanvraag

| Type schakel      | Code*        | Afmetingen [mm] |        |        |      |       |       |       |       | graden ° |    | Afmetingen [mm] |      |       | Breukbelasting |
|-------------------|--------------|-----------------|--------|--------|------|-------|-------|-------|-------|----------|----|-----------------|------|-------|----------------|
|                   |              | Steek / p       | b1 min | b2 max | d1   | d2    | L max | q     | e     | k        | k1 | R               | h    | H     | N min          |
| 08B-2 1Ma5.101 2T | 4410810(1/2) | 12,7            | 7,75   | 11,3   | 4,45 | 8,51  | 31,0  | 11,8  | 13,92 | 30       | 15 | 0,5             | 14,6 | 20,50 | 31800          |
| 10B-2 1Ma.5101 2T | 4411020(1/2) | 15,875          | 9,65   | 13,28  | 5,08 | 10,16 | 35,8  | 14,73 | 16,59 | 36       | 15 | -               | 18,6 | 25,96 | 45400          |

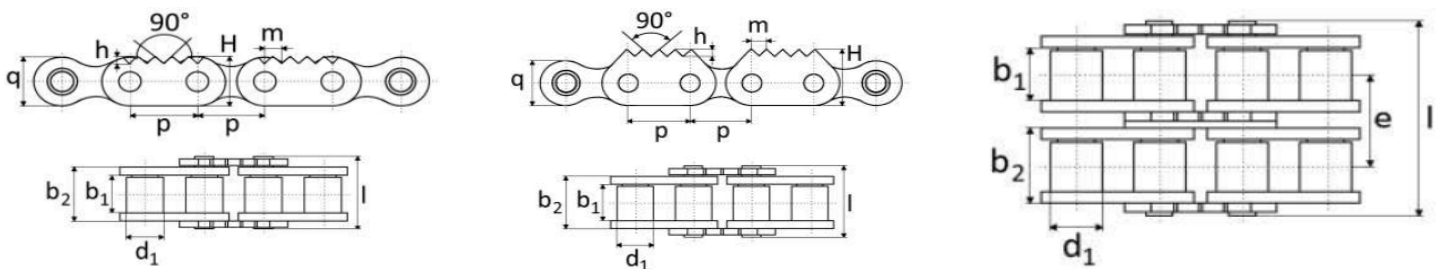

\*) 1 = enkelzijdig, 2 = tweezijdig / complete ketting op aanvraag

| Type schakel                         | Code*        | Afmetingen [mm] |      |       |       |       |     |      |      |       |       | Breukbelasting |  |
|--------------------------------------|--------------|-----------------|------|-------|-------|-------|-----|------|------|-------|-------|----------------|--|
|                                      |              | Steek / p       | q    | b1    | b2    | d1    | e   | h    | H    | m     | l max | N min          |  |
| 16B-1 2Ma3.104GL 2T.00.00            | 4421610(1/2) | 25,4            | 20,3 | 15,88 | 17,02 | 25,45 | 2,5 | 20,3 | 6,35 | -     | 35,0  | 60000          |  |
| 16B-1 2Ma3.105GL 2T.00.00            | 4421620(1/2) | 25,4            | 20,3 | 15,88 | 17,02 | 25,45 | 3,0 | 25,3 | 6,6  | -     | 35,0  | 60000          |  |
| 16B-2 2Ma3.105GL 1Mz3.105GL 2T.00.00 | 4421630(1/2) | 25,4            | 20,3 | 15,88 | 17,02 | 25,45 | 3,0 | 25,3 | 6,6  | 31,88 | 67,3  | 106000         |  |