

TWEEPUNTS FLENSLAGERBLOKKEN PTI

TWO BOLT FLANGE UNITS PTI

Gegoten lagerblokken / OWFK 12 S - OWFK 40 S




OWFK S

GLCTE (met vetnippel)

FLCTE (zonder vetnippel)

Stelbout in binnenring

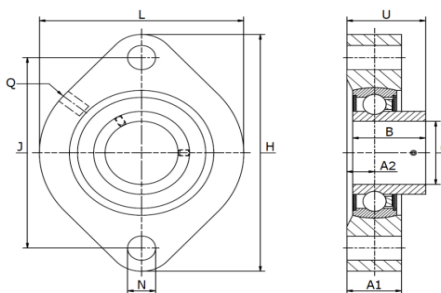

Materiaal: gietijzeren behuizing, radiale insert kogellager

Type	Code	Afmetingen (mm)										Lagertype	Gewicht (kg)
		d	H	U	A ₁	A ₂	B	J	L	N	Q		
OWFK 12 S	310033201	12	81,0	24,4	15,0	8,4	22,0	63,5	58,7	6,6	M6 - 90° smeergat	SB 201	0,30
OWFK 15 S	310033202	15	81,0	24,4	15,0	8,4	22,0	63,5	58,7	6,6	M6 - 90° smeergat	SB 202	0,30
OWFK 17 S	310033203	17	81,0	24,4	15,0	8,4	22,0	63,5	58,7	6,6	M6 - 90° smeergat	SB 203	0,30
OWFK 20 S	310033204	20	90,5	27,0	17,0	9,5	25,0	71,4	66,5	9,0	M6 - 45° smeergat	SB 204	0,39
OWFK 25 S	310033205	25	97,0	29,4	17,5	9,9	27,0	76,2	71,0	9,0	M6 - 45° smeergat	SB 205	0,47
OWFK 30 S	310033206	30	112,5	32,4	20,5	11,4	30,0	90,5	84,0	11,5	M6 - 45° smeergat	SB 206	0,76
OWFK 35 S	310033207	35	126,0	37,9	22,0	12,4	35,0	100,0	94,0	11,5	Rp 1/8" - 90° smeergat	SB 207	1,02
OWFK 40 S	310033208	40	150,0	42,5	24,0	13,5	39,5	119,0	100,0	14,0	Rp 1/8" - 90° smeergat	SB 208	1,27